





## Outdoor Applications

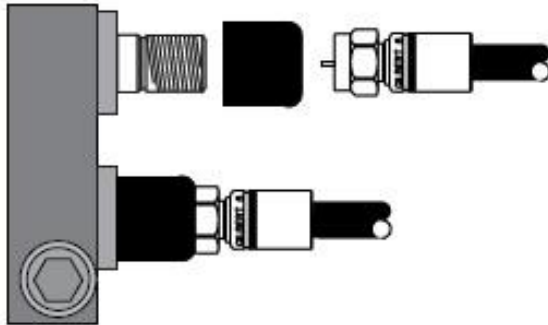

- Push seal ring (G-SR-1/2) onto outdoor port
- Install connector finger tight
- Using a 7/16" wrench, tighten to system specifications

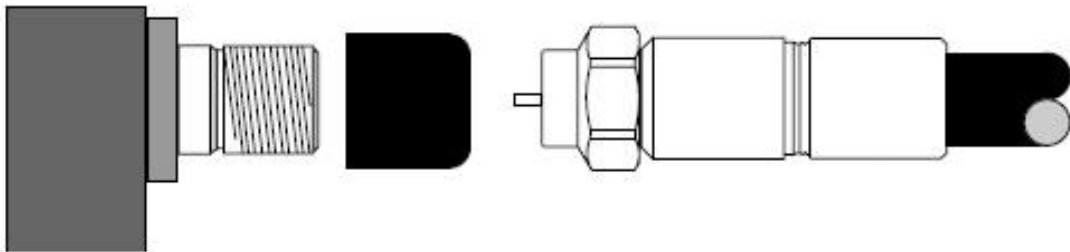

- Push seal ring (G-SR-1/2) onto outdoor port
- Install Connector finger tight
- Using a 1/2" wrench, tighten to system specifications