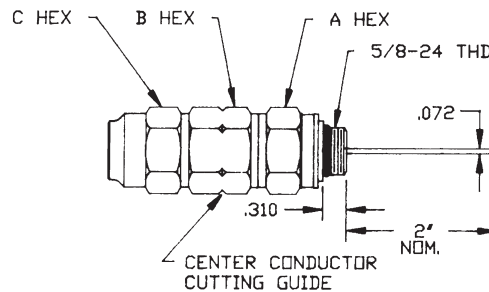


“W” & “G” Series
Three Piece Pin Type


For more information or
to place an order, please
contact Supply Solutions
at 866-978-7759.

PDF courtesy of Thomas & Betts.

5/8"- 24 3 piece pin type entry connector with auto seize technology for enhanced cable seizure. 2" pin and center conductor cutting guide are standard. Common hex size per connector with tapered back nut for consistent heat shrink application. Re-enterable and reusable; three piece design allows visual inspection of connector and cable during attachment.


Ordering Information

CABLE TYPE	CATALOG NUMBER	CENTER COND	CABLE OD	DIMENSIONS			INNER PACK	OUTER PACK
				A	B	C		
P3 & T10	EFI412W3	.092	.412	15/16	15/16	15/16	25	200
	EFI500W3	.109	.500	1	1	1	20	160
	EFI625W3	.137	.625	1-1/8	1-1/8	1-1/8	16	128
	EFI750W3	.167	.750	1-3/16	1-3/16	1-3/16	14	112
	EFI875W3	.194	.875	1-1/2	1-1/2	1-1/2	9	36
	EFI1000W3	.220	1.000	1-3/4	1-3/4	1-3/4	6	24
QR	EFI540QRG	.124	.610	1-1/8	1-1/8	1-1/8	16	64
	EFI715QRG	.166	.785	1-3/16	1-3/16	1-3/16	9	36
	EFI860QRG	.203	.960	1-1/2	1-1/2	1-1/2	9	36
	EFI1125QRG	.263	1.225	1-3/4	1-3/4	1-3/4	6	24
TX	EFI565TX	.129	.565	1-1/8	1-1/8	1-1/8	16	128
	EFI700TX	.163	.703	1-3/16	1-3/16	1-3/16	14	112
	EFI840TX	.194	.840	1-1/2	1-1/2	1-1/2	9	72
MC²	EFI440MC2	.105	.450	15/16	15/16	15/16	25	200
	EFI500MC2	.123	.510	1	1	1	20	160
	EFI650MC2	.156	.640	1-1/8	1-1/8	1-1/8	16	128
	EFI750MC2	.185	.760	1-3/16	1-3/16	1-3/16	9	36
	EFI1000MC2	.248	1.015	1-3/4	1-3/4	1-3/4	6	24
P1	EFI412W	.080	.412	15/16	15/16	15/16	25	200
	EFI500W	.100	.500	1	1	1	20	160
	EFI750W	.148	.750	1-3/16	1-3/16	1-3/16	14	112
	EFI1000W	.193	1.000	1-3/4	1-3/4	1-3/4	6	24
P2	EFI412W2	.092	.412	15/16	15/16	15/16	25	200
	EFI500W2	.111	.500	1	1	1	20	160
	EFI750W2	.169	.750	1-3/16	1-3/16	1-3/16	14	112
	EFI1000W2	.225	1.000	1-3/4	1-3/4	1-3/4	6	24

QR IS A TRADEMARK OF COMMScope, INC.

TX & T10 ARE TRADEMARKS OF TIMES FIBER COMMUNICATIONS

MC² IS A TRADEMARK OF TRILOGY

Thomas & Betts