

**LS24 2150A**  
**LS242150A1FVB000**  
**24-Way Active Splitter (950-2150 MHz)**


**General Description:**


The **LS242150A1FVB000** is a commercial quality 24-way active splitter that meets strict level and match specifications achieved through the use of Quintech's proprietary microstrip and SMT technology. It operates over the 950-2150 MHz frequency range and permits signal splitting with zero loss, eliminating the need for external distribution amplifiers. The LS242150A1FVB000 provides LNB DC power insertion that can be switched on or off via the front panel mounted slide switch (see LNB Power specification below).

Note: All unused RF output ports must have 75  $\Omega$  terminations.  
All outputs are DC blocked.

**Specifications:**

<b>Frequency:</b>	950-2150 MHz
<b>Impedance:</b>	75 $\Omega$
<b>P1dB:</b>	-10 dBm
<b>OIP3:</b>	+3 dBm
<b>Insertion Loss:</b>	0 $\pm$ 2 dB
<b>Frequency Response:</b>	+ 2 dB
<b>Isolation:</b>	18 dB
<b>Input Return Loss:</b>	12 dB
<b>Output Return Loss:</b>	12 dB
<b>Noise Figure:</b>	12 dB
<b>RF Connectors:</b>	Type F, 75 $\Omega$
<b>Power Requirements:</b>	18-24 V <sub>DC</sub> , @ 1A via 2-pin quick connect barrier strip
<b>LNB Power:</b>	18 V <sub>DC</sub> (800 mA max. available for LNB power)
<b>Power Consumption:</b>	5 W @ 18 V <sub>DC</sub> (plus customer LNB power load)
<b>Mechanical:</b>	2 RU (3.5" H x 19" W x 14" D)
<b>Weight:</b>	10.5 lbs. gross (boxed), 7.0 lbs. net
<b>Certifications:</b>	CE

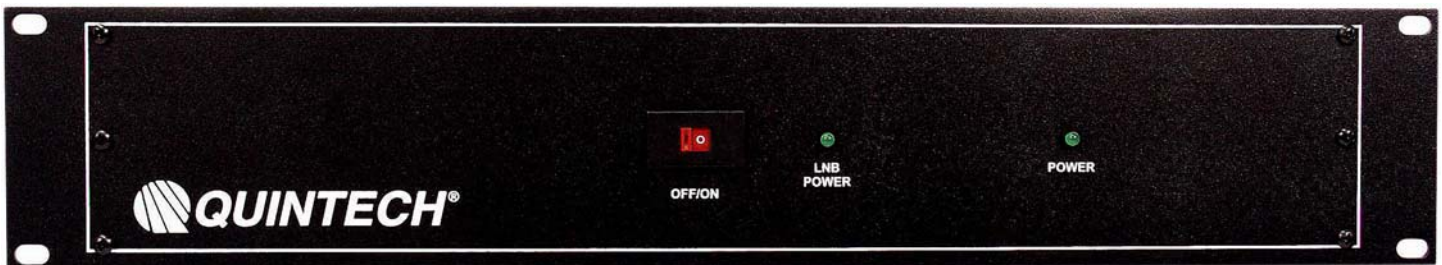

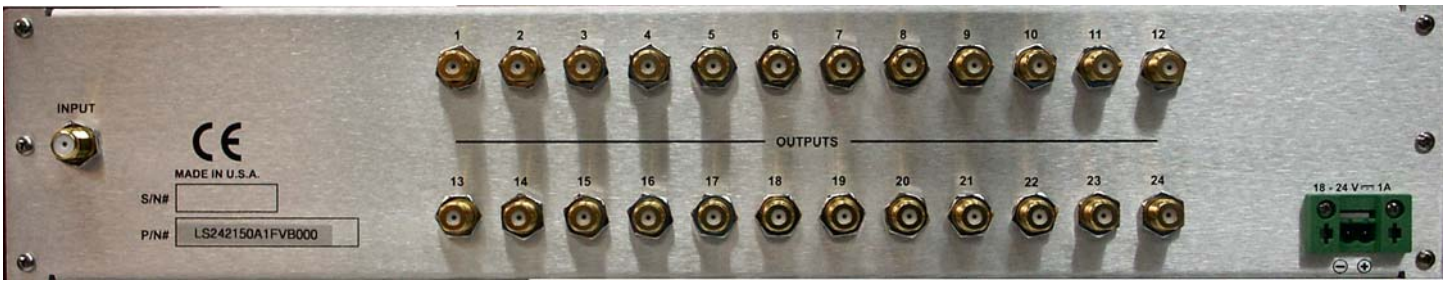

250 Airport Road • Indiana, PA 15701 • (800) 839-3658 • (724) 349-1412 • Fax: (724) 349-1421

<http://www.quintechelectronics.com/> • [info@quintechelectronics.com](mailto:info@quintechelectronics.com)

© 2013 Quintech Electronics and Communications Inc. All rights reserved. All product designs and specifications are subject to change without notice.

LS242150A1FVB000 Rev J, CO#17880 (Page 2 of 1)