



Norsat  
International Inc.

Innovative Communication Solutions

# LNB C-BAND DRO 8000RI

## SPECIFICATIONS

Noise Temperature	30K typ., 35K max. at room temp. @ CF Depending on model number
L.O. Stability	± 500 KHz max.
Phase Noise (SSB) max.	-65 dBc/Hz at 1 kHz -80 dBc/Hz at 10 kHz -95 dBc/Hz at 100 kHz
Input VSWR	2.5 : 1 max.
Output VSWR	2.5 : 1 max.
Gain	60 dB typ., 55 dB min., 70 dB max.
Gain Flatness (over full band)	± 8 dB p-p
Output P1dB	+ 3 dBm min.



DC Power	+ 12V to + 24V DC
Current	250 mA max.
Input (waterproof)	CPR 229G waveguide grooved
Output (waterproof)	F-Connector (75 Ohm) N-Connector (50 Ohm)
Dimensions (L x W x H)	180 mm x 100 mm x 70 mm (7.1 in x 4.0 in x 2.8 in)
Weight	450 g (15.87 oz)
Operating Temperature	- 40 to + 60°C
Storage Temperature	- 50 to + 70°C

## FREQUENCY BANDS


Frequency Band (GHz)	3.625 - 4.80
L.O. Frequency (GHz)	5.75
IF Frequency (MHz)	950 - 2125

## HOW TO ORDER

### 8000RIF

CONNECTOR	F - 75 Ohm N - 50 Ohm
FREQUENCY	RI: 3.625 - 4.8 GHz
LNB SERIES #	

## MECHANICAL DIAGRAM

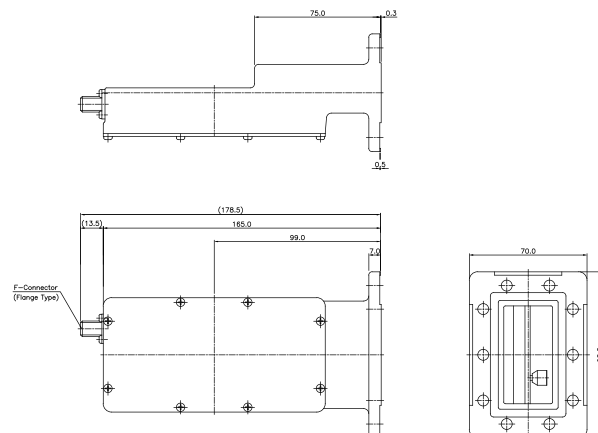

Norsat  
International Inc.



sales@norsat.com  
www.norsat.com